

07-2800

A

jc841 U.S. PTO  
07/27/00

jc862 U.S. PTO  
09/626023  
07/27/00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Numminen, et al.  
Serial No. To be assigned  
Filed: 27 July 2000 Docket No. 930.312US01  
Title: INTERNAL ROAMING

CERTIFICATE UNDER 37 C.F.R. 1.10:

'Express Mail' mailing number: EL492431875US

Date of Deposit: 27 July 2000

The undersigned hereby certifies that this Transmittal Letter and the paper or fee, as described herein, are being deposited with the United States Postal Service 'Express Mail Post Office To Addressee' service under 37 CFR 1.10 and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231

By: Missy Lange  
Missy Lange

Box PATENT APPLICATION  
Assistant Commissioner for Patents  
Washington, D.C. 20231

- ☒ Patent application including 18 pages of specification, 3 pages of claims, 7 sheets of drawings and 1 page of abstract
- ☒ Unsigned Declaration and Power of Attorney
- ☒ Transmittal Sheet
- ☒ Return postcard

**Filing Fees are being deferred**

Authorization is hereby given to charge any additional fees or credit any overpayments that may be deemed necessary to Deposit Account Number 50-1038.

Respectfully submitted,

ALTERA LAW GROUP, LLC  
10749 Bren Road East  
Minneapolis, MN 55343-9056

Michael B. Lasky  
Michael B. Lasky  
Atty. Reg. Number 29,555  
MBL/mka

Dated: 27 July 2000

09626023 072700

## INTERNAL ROAMING

### FIELD OF THE INVENTION

The present invention relates to a routing in a telecommunications network, for example in a company intranet integrated with a cellular phone system, and in particular to a method for dealing with internal roaming and subscribers wishing to access the intranet from other networks.

### BACKGROUND OF THE INVENTION

Prior art office-based communications systems usually operate conventional fixed-line telephone units linked via an internal switchboard or PBX (private branch exchange.) Such fixed-line systems are able to provide relatively high voice quality. However, user mobility is severely impaired. It is also known to connect a base unit for a cordless system such as DECT to the internal PBX. This allows users to use cordless handsets in the office, but the server handsets (unless they are equipped with a dual-mode capability) can not be used outside the local cordless coverage area.

The improvement of digital cellular telephone technologies means that cellular telephone systems can now provide equivalent, if not higher, voice quality than fixed-line systems. Mobile systems also allow greater freedom of movement for the user within the office than do fixed-line systems. However, there can often be difficulties in receiving cellular telephone signals in an office.

RCP (Rich Call Platform) is a proprietary communications system developed by the applicants which introduces the concept of utilising mobile telephone units, such as conventional GSM mobile stations, in an office environment. The system preferably makes use of a known concept called Internet Telephony or Voice-over-IP (Internet Protocol).

Voice-over-IP is a technology which allows sound information to be transmitted

00566031-0700

over existing IP-based Local or Wide Area Networks or the Internet. In a similar way, data and video information can be encoded so as to be capable of transmission over the same networks. The technology thus provides for convergence and integration of three different media types over the same network.

Prior to the advent of Voice-over-IP, offices often operated three separate networks for the transmission of these media types. As indicated above, fixed-line telephone systems coupled to an in-house PBX provided for voice communication, an office-based LAN or Intranet (i.e. a packet-switched internal network), normally comprising computer terminals linked via network cards and under the control of a server station, provided for the transmission of "conventional" computer data, and video cameras linked to monitors via fixed line or remote transmission link provided for video communication.

Voice-over-IP effectively combines these three media types such that they can be transmitted simultaneously on the same packet-switched intranet network or IP-routed throughout the office environment and, using an external network such as the internet, beyond the confines of the office.

In order to provide for such media convergence, Voice-over-IP often uses a specific ITU (International Telecommunication Union) standard protocol to control the media flow over the Intranet. One common standard protocol used in Voice-over-IP systems, and the one used in the RCP system, is termed H.323.

H.323 is an ITU standard for multimedia communications (voice, video and data) and allows multimedia streaming over conventional packet-switched networks. The protocol provides for call control, multimedia management and bandwidth management for both point-to-point (2 end-users) and multipoint (3 or more end-users) conferences. H.323 also supports standard video and audio codecs (compression/decompression methods such as MPEG) and supports data sharing

006/033 26/07 '00 16:38 FAX 020 7831 8040

via the T.120 standard.

Furthermore, H.323 is network, platform and application independent allowing any H.323 compliant terminal to operate in conjunction with any other terminal.

The H.323 standard defines the use of three further command and control protocols:

- a) H.245 for call control;
- b) Q.931 for call signalling; and
- c) The RAS (Registrations, Admissions and Status) signalling function.

The H.245 control channel is responsible for control messages governing the operation of the H.323 terminal including capability exchanges, commands and indications. Q.931 is used to set up a connection between two terminals. RAS governs registration, admission and bandwidth functions between endpoints and Mobile Telephone Servers (defined later).

For an H.323 based communication system, the standard defines four major components:

1. Terminal
2. Gateway
3. Mobile Telephone Server
4. Multipoint Control Unit (MCU)

Terminals are the user end-points on the network, e.g. a telephone or fax unit or a computer terminal. All H.323 compliant terminals must support voice communications, but video and data support is optional.

Gateways connect H.323 networks to other networks or protocols. For an entirely

00/00/00 16:38 FAX 020 7831 8040

internal communications network i.e. with no external call facility, gateways are not required.

Mobile Telephone Servers are the control centre of the Voice-over-IP network. It is under the control of a Mobile Telephone Server that most transactions (communication between two terminals) are established. Primary functions of the Mobile Telephone Server are address translation, bandwidth management and call control to limit the number of simultaneous H.323 connections and the total bandwidth used by those connections. An H.323 "zone" is defined as the collection of all terminals, gateways and multipoint-control units (MCU - defined below) which are managed by a single Mobile Telephone Server.

Multipoint Control Units (MCU) support communications between three or more terminals. The MCU comprises a multipoint controller (MC) which performs H.245 negotiations between all terminals to determine common audio and video processing capabilities, and a multipoint processor (MP) which routes audio, video and data streams between terminals.

The conventional Voice-over-IP system described herein above normally utilises standard fixed-line telephone systems which are subject to the disadvantages outlined above, namely the lack of mobility and the lack of user commands.

The RCP concept takes Voice-over-IP further in that it provides for the use of conventional mobile telephone units, such as GSM mobile stations, within the Voice-over-IP system. To provide for such mobile communications within an intra-office communication network, RCP combines known Voice-over-IP, as described above, with conventional GSM-based mobile systems.

GSM base stations are provided to give coverage within the office, and are connected to the company's intranet. Intra-office calls to or from cellular telephones in the office are routed through the office intranet and extra-office calls

00220"0309250

are routed conventionally through the GSM network. Such a system provides most or all of the features supported by the mobile station and the network such as telephone directories, short messaging, multiparty services, data calls, call barring, call forwarding etc. RCP, therefore, provides for integrated voice, video and data communications by interfacing an H.323-based voice-over-IP network with a GSM mobile network.

The RCP system is a cellular network, similar to the conventional GSM network and is divided into H.323 Zones as described above. One H.323 Zone may comprise a number of cells. Two or more H.323 zones may be contained within an administrative domain. The allocation of H.323 zones to an administrative domain is an issue primarily concerning billing and is therefore not relevant to this invention.

A company RCP may be physically located in two or more separate office sites. These sites may reside in two different countries in areas managed by two or more different GSM operators. They may also reside in different regions of a country, in which two different GSM operators would be competing for customers.

It would be desirable to provide a method of allowing subscribers to use the intranet when visiting different sites belonging to the same company and to make calls from their own site to other company sites.

#### SUMMARY OF THE INVENTION

According to a first aspect of the present invention there is provided an access control system for a wireless telecommunications system comprising: a first base station serving a first site and operable as part of a first wireless telecommunications network; a second base station serving a second site and operable as part of a second wireless telecommunications network; the first and second telephone networks being connected together, whereby a call can be connected between the first base station and the second base station via the first

wireless telecommunications network and the second wireless telecommunications network; and the access control system comprising: a data link of which use is restricted between the first network and the second network, whereby a call may be connected between the first network and the second network; and a first site link access control unit comprising a database for storing identities of wireless terminals at the second site for permitting calls to such terminals made at the first site to be routed from the first site to the second site over the data link.

The identities of the wireless terminals suitably each comprise a number identifying a terminal and also a corresponding second site link access control unit address that suitably permits the terminals to be identified as ones whose home data is stored at the second site.

The access control system suitably comprises a database for storing identities of wireless terminals at the first site for permitting calls to such terminals made at the second site to be routed from the second site to the first site over the data link.

According to a second aspect of the present invention there is provided an access control system for a wireless telecommunications system comprising: a first base station and a first site access control unit for storing access information for wireless terminals permitting such terminals to make calls at the first site by means of the first base station, serving a first site and operable as part of a first wireless telecommunications network; a second base station and a second site access control unit for storing access information for wireless terminals permitting such terminals to make calls at the second site by means of the second base station, serving a second site and operable as part of a second wireless telecommunications network; a data link of which use is restricted between the first site access control unit and the second site access control unit, whereby data may be transferred between the first site access control unit and the second site access control unit; the first site access control unit comprising a database for

09626023-072700

storing information for identifying the identities of wireless terminals whose access information is stored by the second site access control unit, whereby the first site access control unit can access the second site access control unit by means of the data link in order to permit such terminals to make calls at the first site by means of the first base station.

The said database is suitably in the form of a look-up table.

The access information for the wireless terminals may suitably be in the form of an International Mobile Subscriber Identity. This may be the IMSI known from the GSM standard or an equivalent identifier. The access information for the wireless terminals may be in the form of a Temporary Mobile Station Identity Code. This code may enable the first site access control unit to access the International Mobile Station Identity Code.

The access information may be temporarily stored at the first site for enabling the said terminals to make calls at the first site by means of the first base station. Following the said temporary storage of access information, a cancellation procedure may be performed to prevent calls to the said terminals being routed to the second site. The access control unit may be operable to control network access for one or more wireless telecommunications networks.

The access control system is suitably adapted such that if a call made at the first or second site is not made to a wireless terminal of either the first or second site, the call is routed via an external wireless telecommunications network. The external wireless telecommunications network is a GSM network or more generally a network based on the GSM standard. Suitably each such site falls within the coverage area of a different network or different operator. The networks permit roaming of terminals therebetween.

The first base station and the second base station are preferably operable

004220-22092960



Figure 6 shows the cancellation of a Location Update request when a subscriber returns to their own site.

In the figures, like reference numerals indicate like parts.

A company's Rich Call Platform telecommunications system may be distributed so as to be physically located in two or more separate office sites of the company. These sites may be in two or more different countries or otherwise in areas managed by two or more different GSM operators. This environment, where there are subscribers in one RCP from two competing network operators, presents problems for supporting internal roaming and calls. Figure 1 illustrates the environment.

Figure 1 shows a first corporate office site indicated generally by 1, in which a wireless telephone service is provided by a first wireless telephone operator in a first operator network 3, and a second corporate office site belonging to the same company, indicated generally by 2, in which a wireless telephone service is provided, by a second wireless telephone operator in a second operator network 4. In this example the wireless telephone service is a GSM service, but the service could be provided by other communications systems. Within site 1 there is a Base Transceiver Station (BTS) 5, an Intranet Mobile Cluster (IMC) 6, and a RCP Mobile Telephone Server (MTS) 7. Site 1 is connected to operator network 3 via an A-intranet Gateway 8. Within the operator network 3 there is an Intranet Location Register (ILR) 9, a Home Location Register (HLR) 10, a Visitor Location Register (VLR) 11 and a Mobile Switching Centre (MSC) 12. Each employee (subscriber) of this site has a mobile phone 13. The second office site 2 and the second operator network 4 have equivalent components and these are shown with similar reference numerals. Each employee of this site has a mobile phone 113. There is a direct link 16 between the two sites, the use of which will be explained below. There could be other similar additional sites belonging to the

same company which would be linked to sites 1 and 2 by equivalent means.

The BTS is equivalent to a BTS in a standard GSM network and its purpose is to receive and transmit signals to and from mobile phones and to interface with the IMC. The IMC is equivalent to a Base Station Controller in a standard GSM network. Its functions include detection of the possible need for handover, generation of speech and data frames, configuration of the BTS, control of interfacing with the MTS including status enquiry and establishing calls to/from the BTS. The MTS is responsible for controlling access to the intranet, by using information obtained from the ILR 9. The ILR is managed by the home GSM network operator and resides in the home GSM operator premises. It has access to two GSM location registers via a MAP interface, namely the HLR 10 and VLR 11. The HLR and VLR hold all the location information of all subscribers. The HLR is a database which contains all the data concerning the access capabilities of subscribers of the site with which it is associated, and services to which they are entitled. Also the HLR provides MSCs associated with other sites with similar information to allow the subscriber to receive calls whilst visiting another site, for example, site 2. The VLR stores subscriber information for all mobile phones which enter its area of coverage, which allows the MSC to set up calls to and from such phones. When a mobile phone enters its area, the subscriber data is interrogated and can be added to the VLR, so the VLR would contain the address of the subscriber's HLR.

In this environment operators will typically want to manage the local wireless intranet offices (WIOs) and thus have their own ILRs. On the other hand, companies will want to place internal calls between the corporate employees at different RCP sites at minimum cost. For this to be possible, there are two scenarios to be solved.

In the first scenario, an internal call from one RCP office to another residing at a different RCP site, the subscribers belonging to different GSM networks, should

be possible. This can be enabled using a corporate owned global directory. The corporate employees are all listed in the directory and an address to their home RCP area can be found from there.

In the second scenario, it should be possible for a corporate employee of site 3 to visit from his/her local office site to site 1 and make internal calls there regardless of the GSM networks of the corporate employees. This situation is termed "roaming". A subscriber from one RCP site may visit another site, which again may be governed by a different network operator. The roaming to the local RCP network can be enabled and internal calls between subscribers of different GSM operators can be allowed. To enable this an Internal Location Update procedure is introduced in addition to the normal location update that will be performed to the GSM network.

These two scenarios will now be described with reference to three possible situations.

The first situation is that of internal calls between two sites, as shown in Figure 2. The assumption is that the subscribers are not roaming, i.e. they are located at and registered within their own local RCP area, where the respective ILR is directly connected.

This situation occurs when a subscriber of site 1 having a mobile phone 13 wishes to call a second subscriber of site 2 having a mobile phone 113, and both subscribers are located within the base station range of their own home sites. The mobile phone 13 is attached to the BTS 5. When the subscriber makes a call it is routed through the IMC 6 to the MTS 7. The MTS 7 has associated with it an internal database which lists the phone numbers of all subscribers who are currently roaming in the area of site 1, called the local End Point database, to allow them to make internal calls. In this first situation, an extra register is provided, called a Corporate Global Directory. In this embodiment it is stored in

the ILS (intranet location server) register 14. This directory is a list of the phone numbers of all employees on all the different sites belonging to the company, site 1 being one of these sites. The list is hierarchical in that it distinguishes between employees of site 1 and employees of other sites. In addition, the local MTS address is stored with the subscriber number. This MTS address identifies the MTS that is directly connected to the ILR in which the called subscriber's subscriber data is stored. In this example the subscriber from site 2 is not roaming.

When the call arrives at the MTS 7, it searches its internal database (the MTS local End Point database) to see whether the called number is listed. If it were, it would then allow the call to be routed internally on the site 1 intranet. In this first case under consideration, the called number belongs to an employee from site 2 whose phone has not yet updated its location, therefore the number is not found on the internal database. Therefore the MTS then checks the Corporate Global Directory, where it will indeed find the number. In this directory, the local (i.e. site 2) MTS address for the called number is listed with the number, hence the call can be directly routed to site 2 via the direct link 16 to MTS 107 and onto mobile 113. The direct link could be an optical cable or other suitable transmission means.

The procedure may be summarised as follows :

1. The MTS searches for the number of the subscriber being called at site 2 from its own database (the "End Point" database)
2. The number is not found, so the MTS searches the number from the Corporate Global Directory
3. The site 2 subscriber is a member of the corporate RCP so the number and MTS address are found
4. The call is routed to the site 2 subscriber's local RCP (site 2) and the MTS 107 there. The subscriber is registered and his data stored in the End Point database of MTS 7.

002220" E2092960

The advantage of such a system over a situation in which employees' mobile phones attach to external GSM operator base stations is that service quality is likely to be improved because no routing via external GSM networks is required. It would additionally be expected to be less expensive for the company. There would further be increased security for the company because such a direct connection is unlikely to be accessible to the public, though it may be shared by other companies, depending on the type of link.

In the event that the called number is not found on the Corporate Global Directory, the MTS 7 will route the call through the A-internet Gateway 8 to the external GSM network. Thus the direct link 16 is used exclusively for internal calls and is therefore unlikely to incur traffic congestion problems.

The Intranet Location Server is generally used for NetMeeting address translation purposes. In Rich Call Platform systems the ILS can additionally be used for routing calls between Mobile Telephone Servers that e.g. are physically located in separate office areas i.e. at separate RCP sites. In such a configuration the ILS holds the information of all the workers of the company. When a mobile 13 that locates at a first office at site 1 calls a mobile 113 that locates at a second site 2 of a second office, the ILS is searched and the address of the site 2 Mobile Telephone Server can be found. This address can be used to route the mobile call from site 1 to the site 2 Mobile Telephone Server and further onto mobile 113 in the second office.

The second situation is an example of scenario 2 in which a subscriber from one site is visiting another site and may wish to make a call back to their home site. This means the subscriber is "internally roaming". This situation requires an Internal Location Update, an example being when a corporate RCP member who is normally located at a RCP area abroad visits a local RCP area that is governed by the local GSM network operator.

002220" 00000000

The solution is to have the MTS 7 configured to store an IMSI look-up table. An example of such a table is shown in Figure 4. Each RCP member has a Mobile

Country Code and a Mobile Network (area) Code (as they would in a GSM system), and this information is then used to provide the home MTS address of the member, in this case MTS 107. Once this address has been determined, the MTS 7 can route the LU (location update) to MTS 107 in site 2, from where the request passes to the ILR 109 of the operator network 4 along link 17 as shown in Figure 3. The ILR 109 informs the MTS 7 as to whether the subscriber is a RCP member or not. If he is, as in this particular case, the ILR 109 returns basic services. Once the MTS receives an answer from the ILR, it can start the location update procedure in the GSM network. In this way, the subscriber data can be retrieved through the internal network to be temporarily stored in MTS end-point-database and the VLR. Once this process has been completed, calls made by this subscriber from site 2 situated temporarily at site 1 having a mobile phone 113 to site 2 are routed directly via the direct link 16. This gives the same advantages as described above for the first situation. Additionally, the normal GSM location update transaction is not delayed much because of the new RCP internal procedure.

The procedure may be summarised as follows :

1. The IMSI is not found from the database on site 1. It is found to be in the area of another GSM network.
2. The MTS re-routes the location update request internally to the other RCP site in the area of the other GSM network using the corporate private intranet.
3. The Internal Location Update request is received by the subscriber's home network ILR. The home network ILR sends subscriber services and updates the visited MTS address to the ILR database.

If the subscriber is not a RCP member, the MTS has an option to reject the location update through the company network.

004240" E2092960



The MTS 7 in this embodiment is a Special Gateway MTS. This means it is the only connection to other RCPs for the particular GSM network 3 in the particular country in which it is situated. Therefore, other RCPs address this particular MTS for LU requests, and it routes the request to the correct ILR in the correct RCP within the GSM network, possibly via other RCP Mobile Telephone Servers within the particular GSM and RCP network. This feature is not necessary for the process to work between sites 1 and 2 as described above.

The third situation is when a first subscriber from one site is visiting another site and a second subscriber at a third site wishes to ring the first subscriber. This situation is depicted in Figure 5, in which a subscriber, having a mobile phone 113, from site 2 is visiting site 200 and a subscriber in site 1 from site 1 and having a mobile phone 13 rings him. The subscriber from site 2 will already have made a location update to the office at site 200 which he is visiting, as described above for situation 2. The MTS 7 first searches its own local End Point database to see if the called person is from site 1. In this case the number will not be found, so the MTS 7 then checks the Corporate Global Directory, which in this embodiment is stored in the ILS. This will establish that the called person is a RCP subscriber and, since the "home" MTS address, which in this case is MTS 107, is stored with the subscriber number, will find the "home" MTS address. The "home" ILR has the address of the MTS that the subscriber is currently visiting, that is MTS 207 of site 200. The called person's data will be held in the ILR 209 of the operator network 201 associated with the site 200. Thus the call can be routed directly to the subscriber from site 2 through the RCP via links 16 and 216.

This procedure may be summarised as follows :

1. The MTS searches for the site 2 subscriber's number from its own local database.
2. The number is not found, so the MTS searches the number from the Corporate Global Directory.

00220"0209250

3. Since the site 2 subscriber is a member of the corporate RCP so the number and MTS address where the subscriber's ILR is connected to (i.e. at site 200) is found.
4. The call is routed to the home RCP MTS at site 200 but the subscriber is not registered, nor is his subscriber data stored in the MTS database.
5. The Corporate Global Directory is searched and it is found that the subscriber belongs to the area of the local ILR.
6. The subscriber's location MTS address is retrieved from the ILR and the call is routed there.

It will be appreciated by those skilled in the art that variations on the three situations could easily be envisaged for dealing with other similar call situations. In particular the concepts could be extended to work between a large number of corporate sites within a RCP. Furthermore, a combination of the procedures would allow calls to be connected regardless of the direction of the calls being made.

Following an LU procedure involving a roaming subscriber, there is also an Internal Cancel Location procedure which happens automatically when the roaming subscriber's phone requests an LU at the site which he is visiting. The purpose of this is to delete the original subscriber details from the home site MTS End Point Database and delete the original location information from the ILR database so that all calls are routed to and from his temporary location automatically. This means the checking procedure does not have to be performed each time. Similarly, on his return home, an LU will be requested at his home MTS, and then the cancellation procedure to the MTS which he was visiting will be carried out. This process is shown in Figure 6 and can be summarised as follows :

1. New internal location update request is received.
2. ILR starts Internal Cancel Location to the previous location MTS.

Finally, the interaction between a corporate RCP and GSM networks during a Location Update procedure should be considered. There must not be a situation created in which the mobile subscriber is able to roam internally to a RCP but is not able to roam into any GSM network in the area. This is because RCP outgoing or incoming calls would not be possible in such a situation, and also for security reasons.

Therefore the full location update procedure including both RCP and GSM network location updates must be performed in the following order :

1. If necessary, the TMSI is used to retrieve the subscriber's IMSI from the previous location VLR.
2. The MTS makes an LU request to the subscriber's ILR. If the subscriber is a RCP member, the ILR returns basic services and sends an Internal Cancel Location request to the previous location MTS.
3. A location update is started through the A-intranet Gateway to the GSM network if the location update through the corporate network is rejected.

Only after the MTS has received a positive acknowledgement from the MSC to the location update request, the MTS requests the rest of the subscriber data from the ILR, which in turn retrieves the data from the HLR. If the location update is rejected by the MSC, the MTS must delete the subscriber data and location information from its database and the ILR.

00424010092950

WHAT IS CLAIMED IS:

1. An access control system for a wireless telecommunications system comprising:

a first base station serving a first site and operable as part of a first wireless telecommunications network;

a second base station serving a second site and operable as part of a second wireless telecommunications network;

the first and second telephone networks being connected together, whereby a call can be connected between the first base station and the second base station via the first wireless telecommunications network and the second wireless telecommunications network; and

the access control system comprising :

a data link of which use is restricted between the first network and the second network, whereby a call may be connected between the first network and the second network; and

a first site link access control unit comprising a database for storing identities of wireless terminals at the second site for permitting calls to such terminals made at the first site to be routed from the first site to the second site over the data link.

2. An access control system according to claim 1, wherein the identities of the wireless terminals each comprise a number identifying a terminal and a corresponding second site link access control unit address.

3. An access control system according to claim 1, comprising a database for storing identities of wireless terminals at the first site for permitting calls to such terminals made at the second site to be routed from the second site to the first site over the data link.

09022603-072700

7. An access control system according to claim 4, in which the access information for wireless terminals is in the form of a Temporary Mobile Station Identity Code for allowing the first site access control unit to access the International Mobile Station Identity Code.

8. An access control system according to claim 4, in which the access information is temporarily stored at the first site for enabling the said terminals to make calls at the first site by means of the first base station.
9. An access control system according to claim 1, wherein the access control unit is operable to control network access for one or more wireless telecommunications networks.
10. An access control system according to claim 1, wherein if a call made at the first or second site is not made to a wireless terminal of either the first or second site, the call is routed via an external wireless telecommunications network.
11. An access control system according to claim 1, wherein the external wireless telecommunications network is a GSM network.
12. An access control system according to claim 8, wherein following the said temporary storage of access information, a cancellation procedure is performed to prevent calls to the said terminals being routed to the second site.
13. An access control system according to claim 1, in which each site falls within the coverage area of a different GSM network
14. An access control system as claimed in claim 13, wherein the GSM networks permit roaming of terminals therebetween.

## ABSTRACT

## INTERNAL ROAMING

An access control system for a wireless telecommunications system comprising: a first base station serving a first site and operable as part of a first wireless telecommunications network; a second base station serving a second site and operable as part of a second wireless telecommunications network; the first and second telephone networks being connected together, whereby a call can be connected between the first base station and the second base station via the first wireless telecommunications network and the second wireless telecommunications network; and the access control system comprising: a data link of which use is restricted between the first network and the second network, whereby a call may be connected between the first network and the second network; and a first site link access control unit comprising a database for storing identities of wireless terminals at the second site for permitting calls to such terminals made at the first site to be routed from the first site to the second site over the data link.

Figure 1

[illegible]

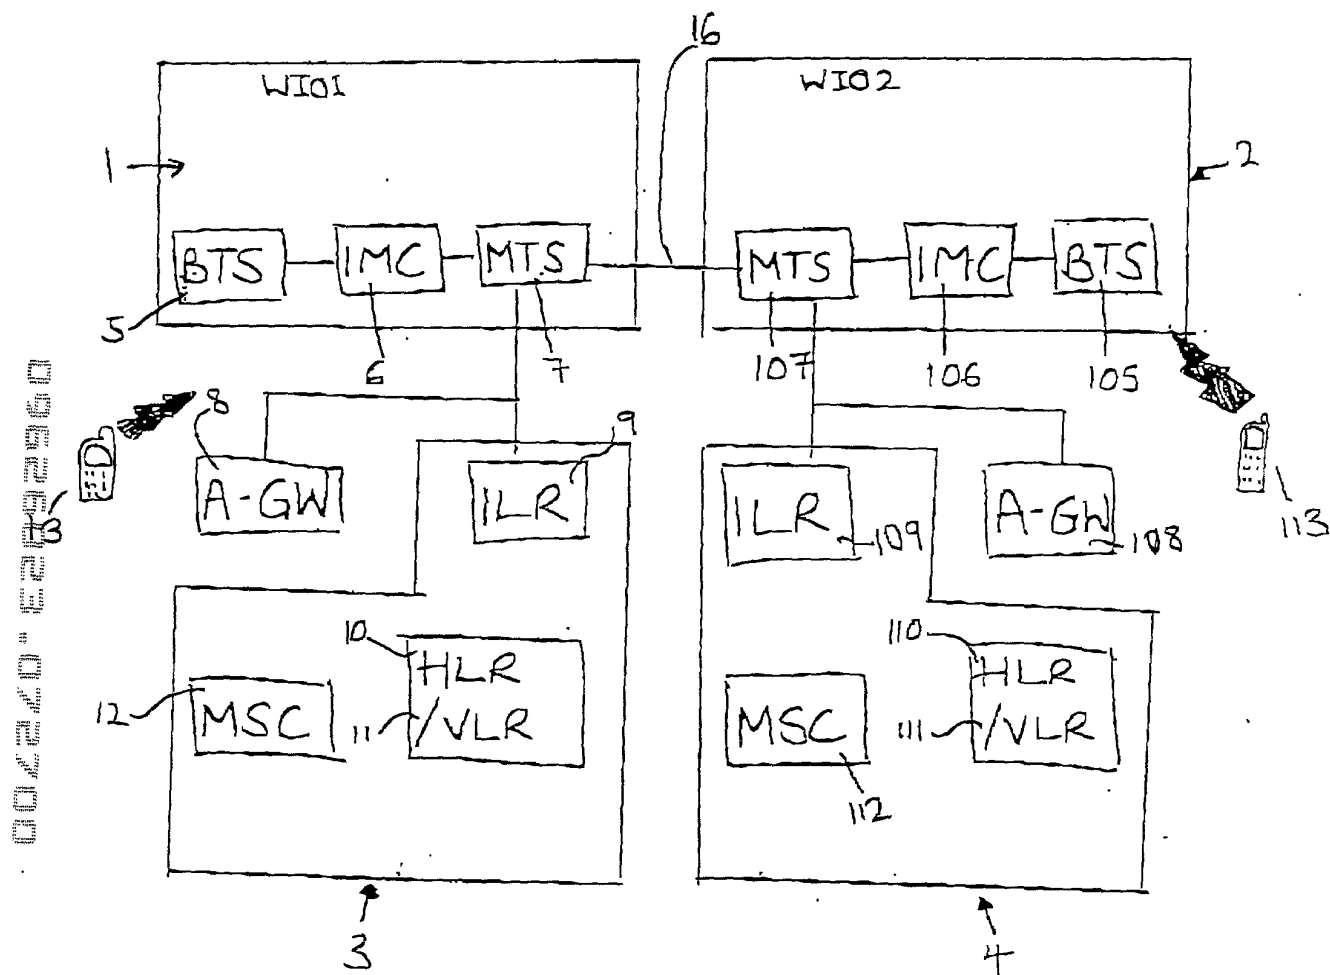
Fig. 1



Fig. 2

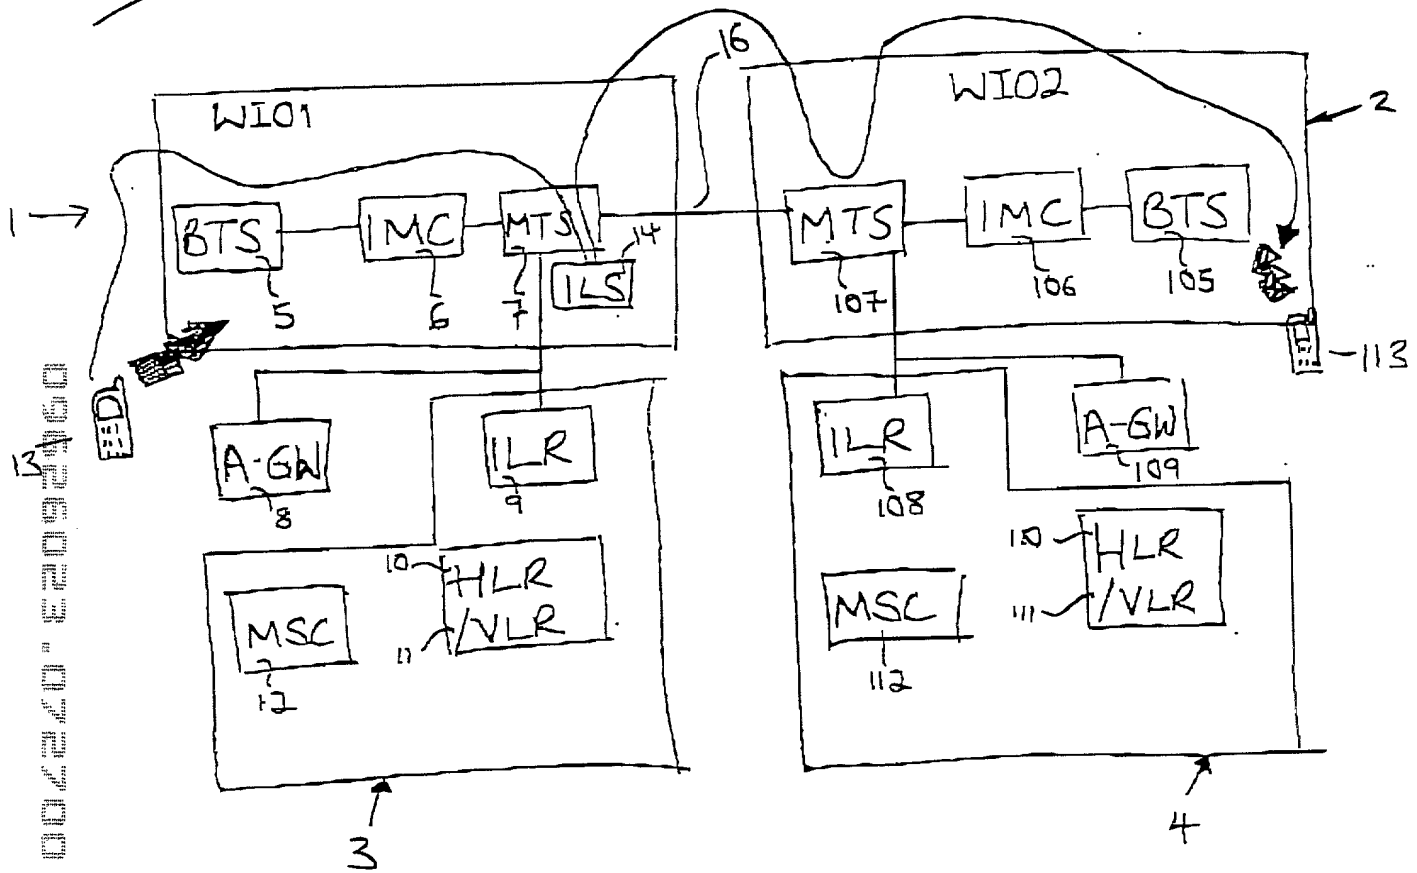




Fig. 4.

Mobile Country Code, Mobile Network Code		Gateway WGK address
244	01	xxx.xxxxx.xxxx.
123	05	zzz.zzzz.zzzzzzz

002240-02092950

Fig. 5.



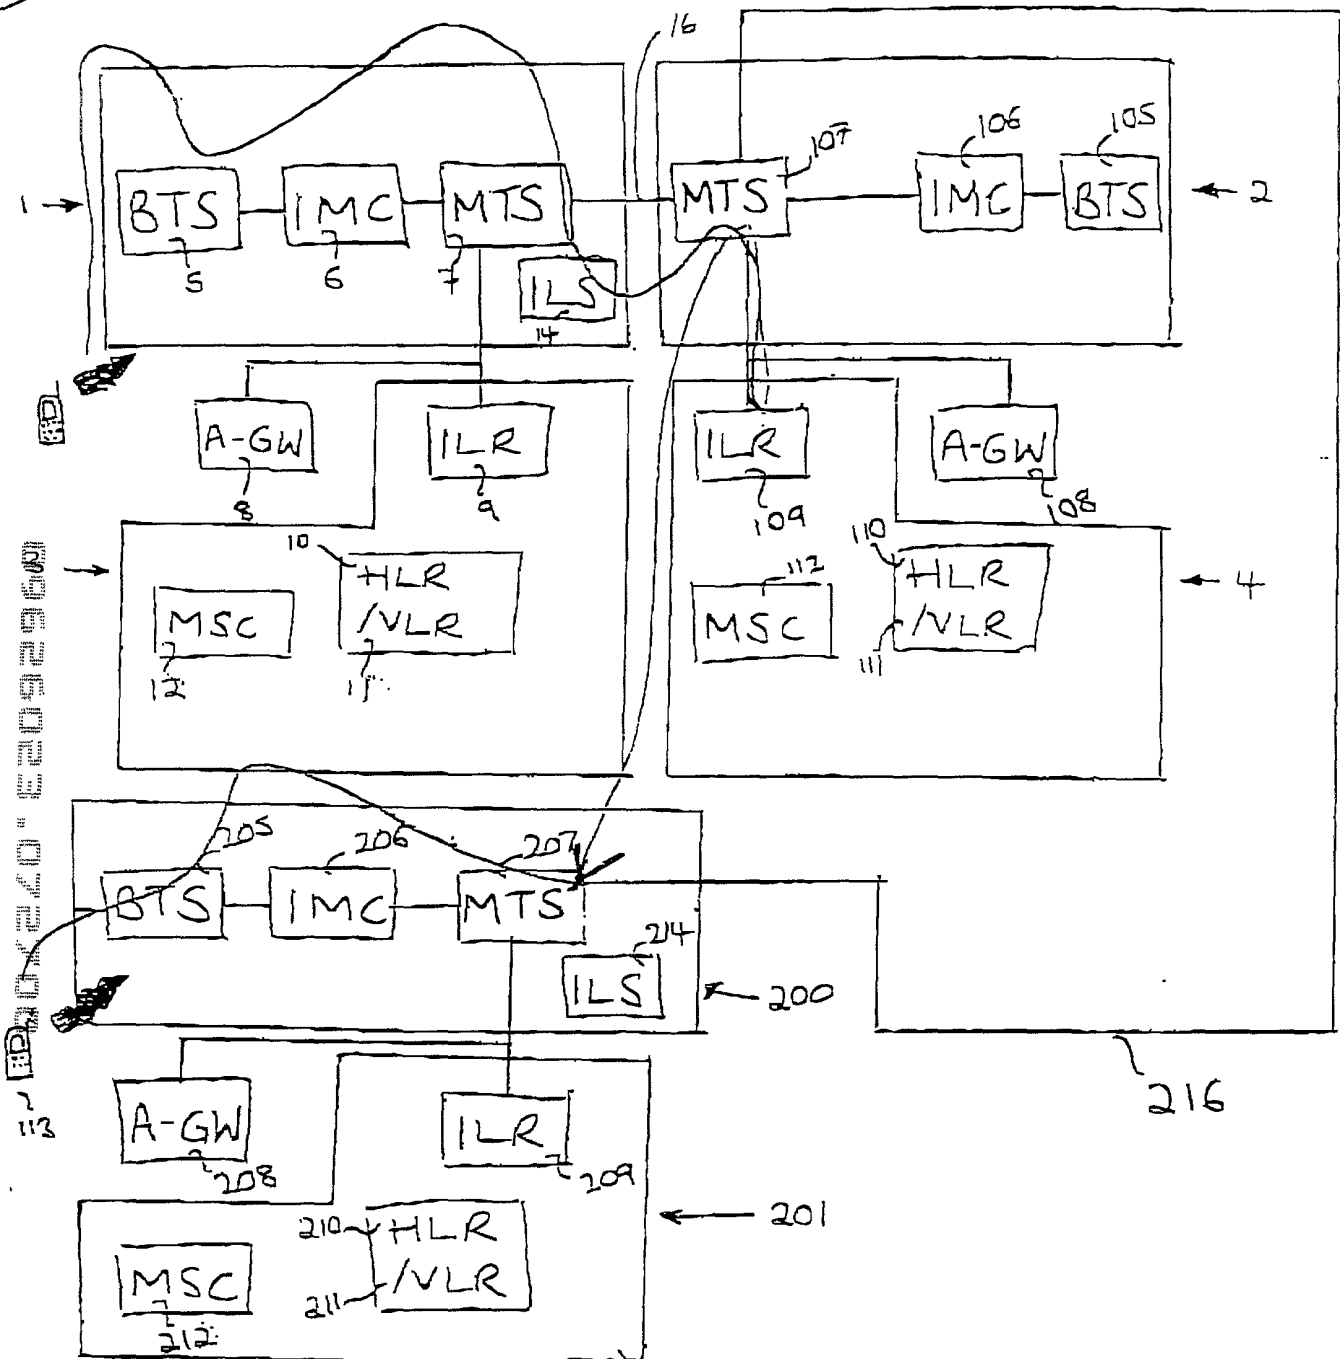


Fig. 6.

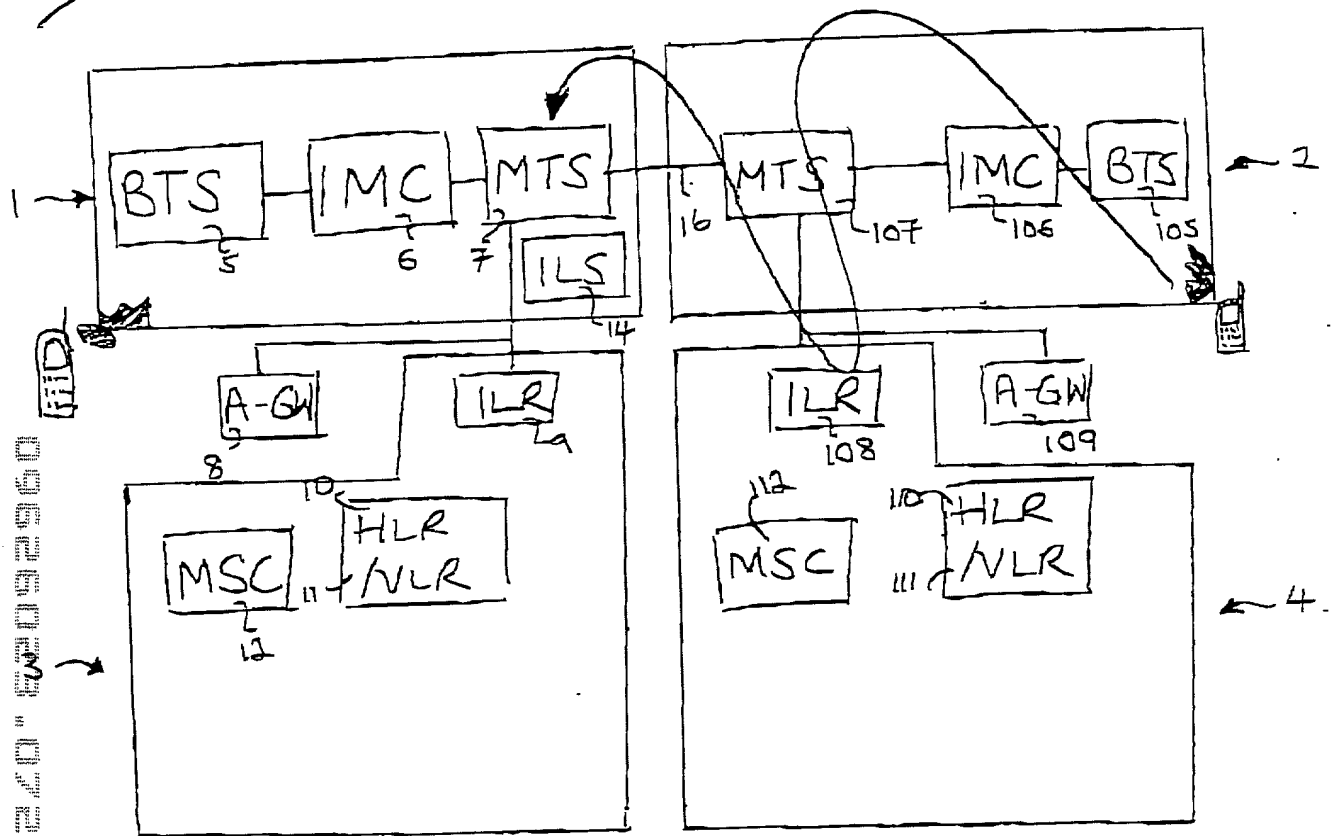

002320" 200929560

Fig. 7.

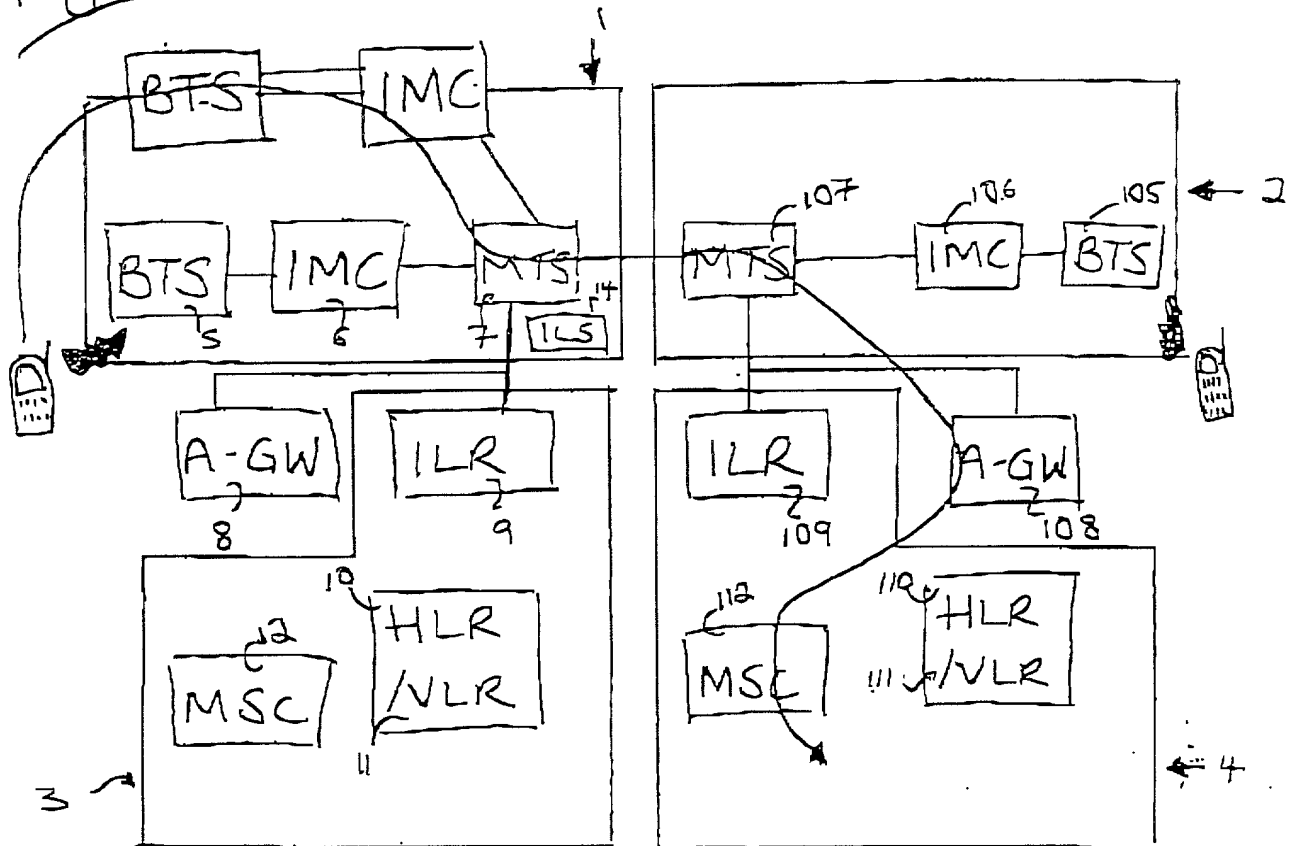

002220-82092960

**Altera Law Group, LLC**

**Declaration and Power of Attorney Patent Application  
(Design or Utility)**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: INTERNAL ROAMING

the specification of which

- ☐ is referred to by Altera reference number on a separate document  
☒ is attached hereto  
☐ was filed on 27 July 2000 as application serial no. \_\_\_\_\_ and or PCT International Application number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information know to me to be material to patentability as defined in 37 C.F.R. §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or 35 U.S.C. §365(b) of any foreign application(s) for patent or inventor's certificate, or 35 U.S.C. §365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate of PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)		
Number 9918043.2	Country United Kingdom	Day/Month/Year Filed 30 July 1999
Number	Country	Day/Month/Year Filed
Number	Country	Day/Month/Year Filed

002740" E2092950

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below:

Prior Provisional Application(s)	
Serial Number	Day/Month/Year Filing Date
Serial Number	Day/Month/Year Filing Date
Serial Number	Day/Month/Year Filing Date

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s), or under 35 U.S.C. §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. §1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

Prior U.S. or International Application(s)		
Serial Number	Day/Month/Year Filed	Status (patented, pending, abandoned)
Serial Number	Day/Month/Year Filed	Status (patented, pending, abandoned)
Serial Number	Day/Month/Year Filed	Status (patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements are made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. §1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

00220623360



## Power of Attorney

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Steven R. Funk      Reg. No. 37,830  
David W. Lynch      Reg. No. 36,204  
Karen D. McDaniel      Reg. No. 37,674

Mark A. Hollingsworth      Reg. No. 38,491  
Michael B. Lasky      Reg. No. 29,555  
Iain A. McIntyre      Reg. No. 40,337

I hereby authorize them or others whom they may appoint to act and rely on instructions from and communicate directly with the person/organization who/which first sends this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct Altera Law Group, LLC otherwise.

Please direct all correspondence in this case to Altera Law Group, LLC at the address indicated below:

Michael B. Lasky  
Altera Law Group, LLC  
10749 Bren Road East, Opus 2  
Minneapolis, MN 55343

Full Name of Sole or First Inventor		
Family Name Numminen	First Given Name Raii	Second Given Name
Residence and Citizenship		
City of Residence Tampere	State or Country of Residence Finland	Country of Citizenship Finland
Post Office Address		
Street Address Ojalanylantie 17	City 33610 Tampere	State & Zip Code or Country Finland
Signature of Inventor		Date

Full Name of Second Inventor, if any		
Family Name Rissanen	First Given Name Pekka	Second Given Name
Residence and Citizenship		
City of Residence Tampere	State or Country of Residence Finland	Country of Citizenship Finland
Post Office Address		
Street Address Yrttikatu 8A3	City 33710 Tampere	State & Zip Code or Country Finland
Signature of Inventor		Date

002220" 0032260

Full Name of Third Inventor, if any		
Family Name Narvanen	First Given Name Kai	Second Given Name
Residence and Citizenship		
City of Residence Pirkkala	State or Country of Residence Finland	Country of Citizenship Finland
Post Office Address		
Street Address Mesimarjakuja 4	City 33960 Pirkkala	State & Zip Code or Country Finland
Signature of Inventor		Date

00220" E3032960